



ST CRAWLER CARRIERS

Operating weight from 23,149 lbs / 10,500 kg

Horsepower 225 HP / 168 kW



FLEXIBLE CABINS



One or Two Crew Capacity

Spacious interchangeable cabins to accommodate a one- or two-person crew.

VERSATILITY ACROSS TERRAIN



Rubber Undercarriage

For road crossings, soft/sandy or muddy terrain, or when the job calls for a smoother finish.



Steel Undercarriage

In steep, rocky or icy terrain switch to the steel undercarriage for more traction.


FLATBED, DUMP BED, WELDING, PIPE SAND-BLASTING, WATER SPRAY SEEDING/RECLAMATION, FU



Modular Bed System

Easily reconfigure your tractor to meet the needs of the job.

CARRIER, ROCK/MATERIAL HAULING, ER, HEAT INDUCTION, COATING, EL/LUBE, LINE LOCATING...

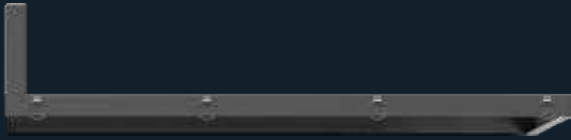

Light and Heavy Duty Flatbed
(Dump Cylinders Included)



Welding Deck



Sand-blasting Deck



**Rock/Material Hauling
Dump Bed**



Automatic Welding Deck





Personnel Carrier

ST-150X





Rubber Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	5.6 mph / 9 km/h
Weight	26,455 lbs / 12,000 kg
Load capacity	15,000 lbs / 6,800 kg
Hydraulic boom size	2,200 lbs (at 22 ft) / 1 ton (at 7 m)

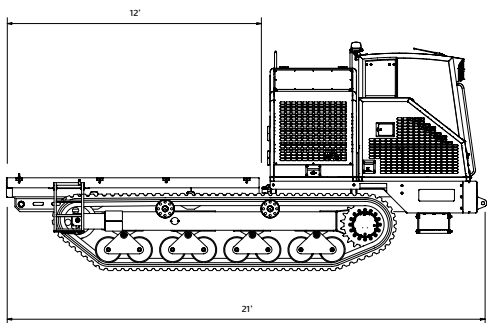

Steel Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	3.7 mph / 6 km/h
Weight	28,660 lbs / 13,000 kg
Load capacity	15,000 lbs / 6,800 kg
Hydraulic boom size	2,200 lbs (at 22 ft) / 1 ton (at 7 m)

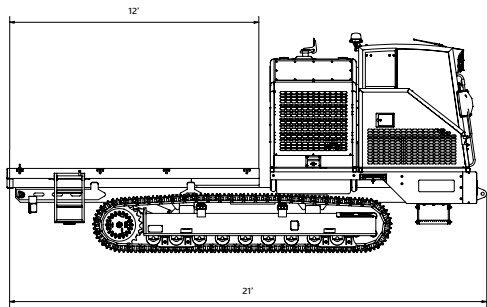

ST-220XR



Rubber Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	5.6 mph / 9 km/h
Weight	TBD
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)
Platform Rotation	360 Degrees

Steel Undercarriage



Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	3.7 mph / 6 km/h
Weight	TBD
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)
Platform Rotation	360 Degrees

ST-220X





Rubber Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	5.6 mph / 9 km/h
Weight	33,774 lbs / 15,320 kg
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)

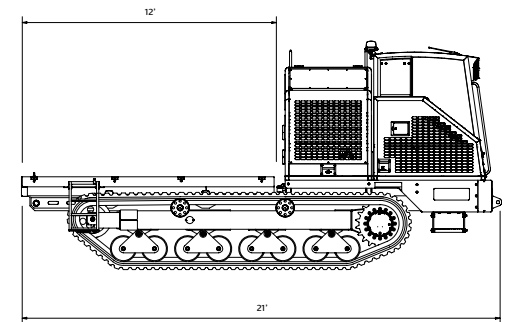


Steel Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	3.7 mph / 6 km/h
Weight	35,979 lbs / 16,320 kg
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)

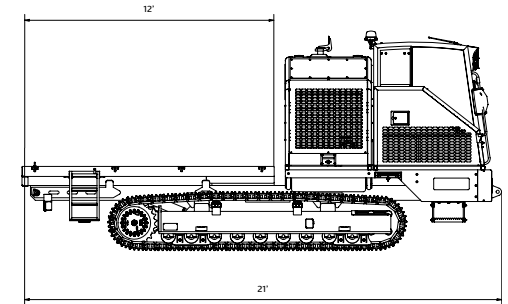

ST-300X

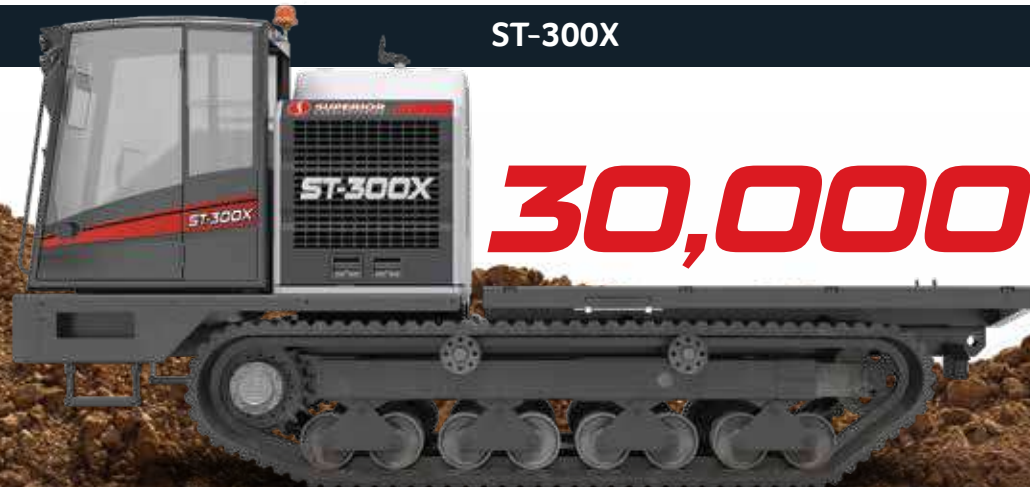

30,000 lbs



Padding Machines



Pipelayers



Crawler Carriers



Pipeline Accessories



Pipe Benders



Hydraulic Kits



Pipe Facing Machines



Vacuum Lifts



Top-Loading Padders



Rock Dump Crawlers



2200 Post Oak Blvd., Ste. 1400 | Houston, TX 77056
Main 281.457.4400 | U.S. Toll Free 800.383.2666
sales@superiormftg.com | www.superiormftg.com

U.S.
Phone +1.281.457.4400

MEXICO & LATIN AMERICA
Phone +54.911.5049.8121

EUROPE
Phone +49.0.231.963.3073

AFRICA
Phone +49.0.170.583.4021

MIDDLE EAST & ASIAN PACIFIC
Phone +61.0.488.661.985

CANADA
Phone +1.281.457.4400

BRAZIL
Phone +54.911.4083.1274

INDIA
Phone +91.11.414.59230

AUSTRALIA
Phone +61.0.400.144.432

*Weights and dimensions are approximate. All information is subject to change without notice.
All trademarks are the property of their respective owners. All rights reserved.*