



ST CRAWLER CARRIERS

Operating Weight	from 23,149 lbs / 10,500 kg
Horsepower	225 HP / 168 kW

ST-150X
ST-220X
ST-220XR
ST-300X



ST CRAWLER CARRIERS

ST-150X
ST-220X
ST-220XR
ST-300X

Operating Weight	from 23,149 lbs / 10,500 kg
Horsepower	225 HP / 168 kW






Operating Weight	from 23,149 lbs / 10,500 kg
Horsepower	225 HP / 168 kW

FLEXIBLE CABINS



One or Two Crew Capacity

Spacious interchangeable cabins to accommodate a one or two person crew.

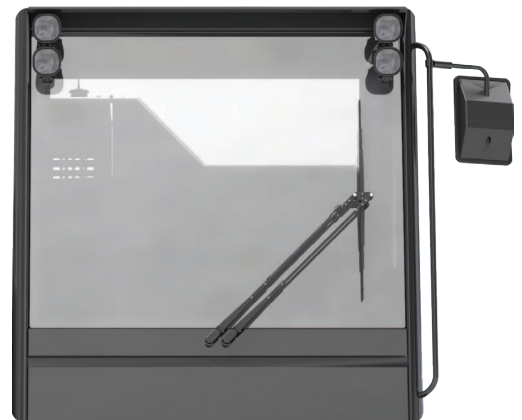

VERSATILITY ACROSS TERRAIN




Rubber Undercarriage

For road crossings, soft/sandy or muddy terrain, or when the job calls for a smoother finish.

Steel Undercarriage

In steep, rocky or icy terrain switch to the steel undercarriage for more traction.

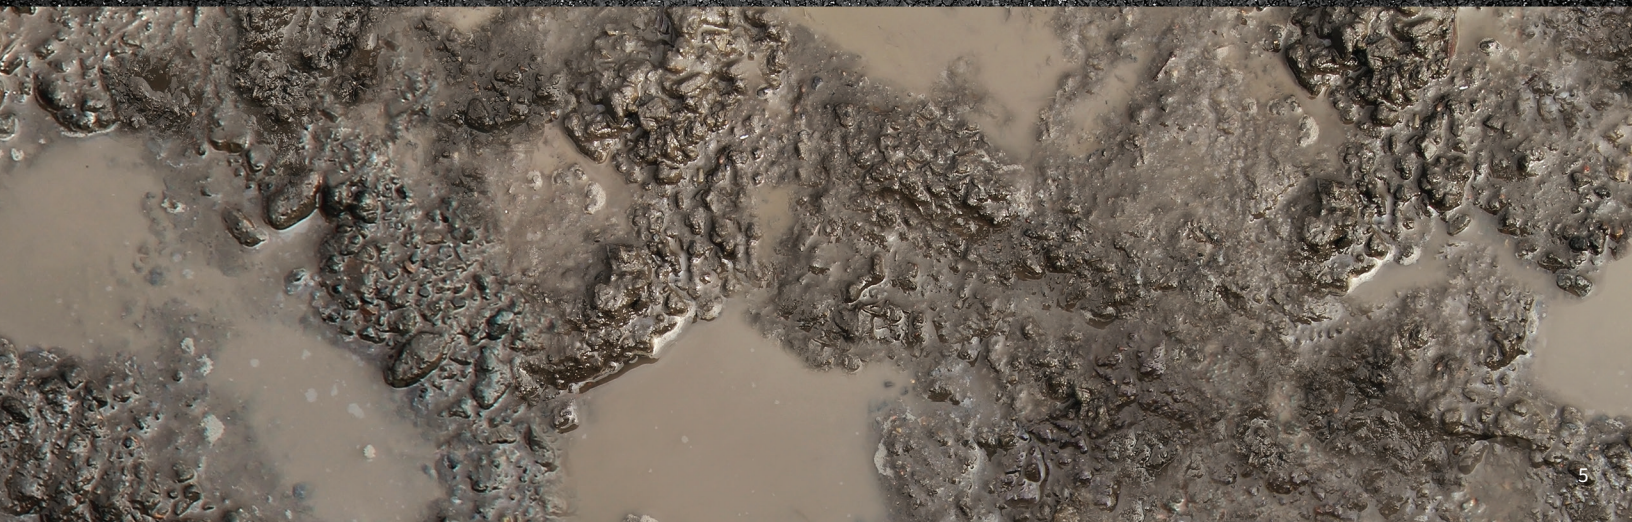


**FLATBED, DUMP BED, WELDING,
PIPE CARRIER, ROCK/MATERIAL
HAULING, SAND-BLASTING,
WATER SPRAYER, HEAT INDUCTION,
COATING, SEEDING/RECLAMATION,
FUEL/LUBE, LINE LOCATING**



Modular Bed System

Easily reconfigure your tractor to meet the needs of the job.


Bed Configurations

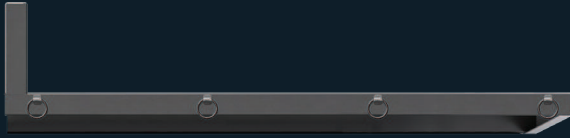

Light and Heavy Duty Flatbed
(Dump Cylinders Included)



Welding Deck

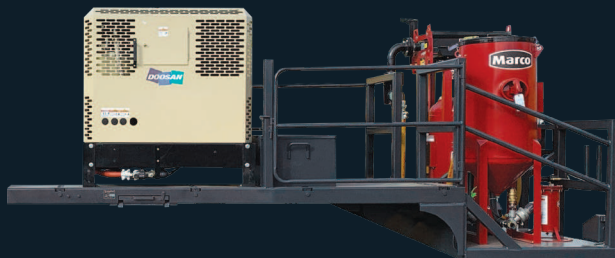

Sand Blasting Deck



Automatic Welding Deck



Rock/Material Hauling
Dump Bed




Personnel Carrier

Bed Configurations




Rubber Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	5.6 mph / 9 km/h
Weight	26,455 lbs / 12,000 kg
Load capacity	15,000 lbs / 6,800 kg
Hydraulic boom size	2,200 lbs (at 22 ft) / 1 ton (at 7 m)

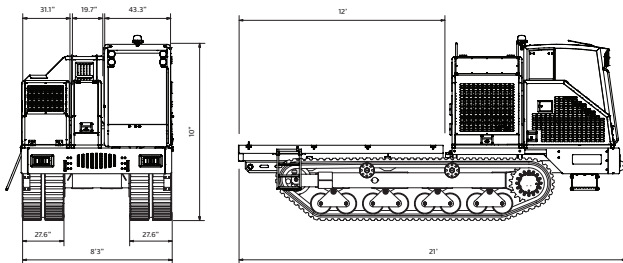

Steel Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	3.7 mph / 6 km/h
Weight	28,660 lbs / 13,000 kg
Load capacity	15,000 lbs / 6,800 kg
Hydraulic boom size	2,200 lbs (at 22 ft) / 1 ton (at 7 m)

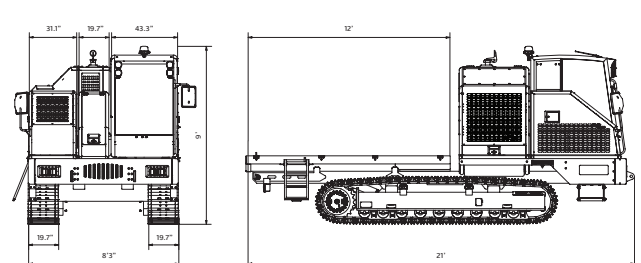

Rubber Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	5.6 mph / 9 km/h
Weight	TBD
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)
Platform Rotation	360 Degrees

Steel Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	3.7 mph / 6 km/h
Weight	TBD
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)
Platform Rotation	360 Degrees







Rubber Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	5.6 mph / 9 km/h
Weight	33,774 lbs / 15,320 kg
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)



Steel Undercarriage

Engine	C-7.1 Tier IV Final
Horsepower	225 HP / 168 kW
Governed speed	2,200 rpm
Maximum speed	3.7 mph / 6 km/h
Weight	35,979 lbs / 16,320 kg
Load capacity	22,046 lbs / 10,000 kg
Hydraulic boom size	3,300 lbs (at 22 ft) / 1.5 ton (at 7 m)

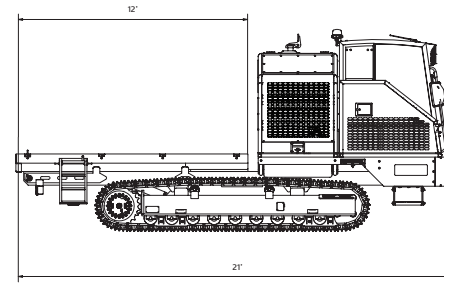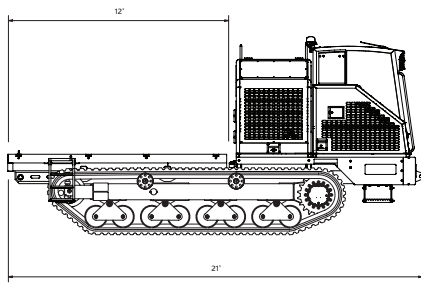

30,000^{lbs}



Padding Machines




Pipelayers



Crawler Carriers



Pipeline Accessories



Pipe Benders



Hydraulic Kits



Pipe Facing Machines



Vacuum Lifts



Top-Loading Padders



Rock Dump Crawlers



2200 Post Oak Blvd., Ste. 1400 | Houston, TX 77056
Main 281.457.4400 | U.S. Toll Free 800.383.2666
sales@superiormftg.com | www.superiormftg.com

U.S.
Phone +1.281.457.4400

MEXICO & LATIN AMERICA
Phone +54.911.5049.8121

EUROPE
Phone +49.0.231.963.3073

AFRICA
Phone +49.0.170.583.4021

MIDDLE EAST & ASIAN PACIFIC
Phone +61.0.488.661.985

CANADA
Phone +1.281.457.4400

BRAZIL
Phone +54.911.4083.1274

INDIA
Phone +91.11.414.59230

AUSTRALIA
Phone +61.0.400.144.432